


51.2 V 630Ah LiFePO4




- Extremely durable and reliable
- High charging efficiency with high current
- Improved cycle life performance
- Improved 100% Domestic BMS Technology
- Vibration resistant (suitable for mobile applications)
- Series and parallel connection capability

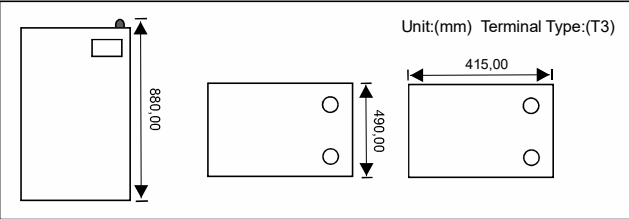


Parameter Chart:

Volts		51.2 V 630Ah	
Capacity(25°C)	10 hours rate (10A)	630 Ah	
Internal Resistance	Full Charged Battery 25°C	≤ 20mΩ	
Capacity Affected By Temperature (at 0.5C)	40°C	101%	
	25°C	100 %	
	0°C	93 %	
	-20°C	80 %	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91 %	
	Capacity After 6 Months Storage	82 %	
	Capacity After 12 Months Storage	60 %	
Charge (Constant Voltage)	Cycle (25°C)	Recommended Initial Charging Current Less Than 100 A Voltage 56,8 V - 58,4 V	
Discharge Current (25°C)	103 A (Max. continuous) ; 200 A (5 Seconds)		
Weight (Approx)		260 kg +/- %2	


Discharge Current 25°C

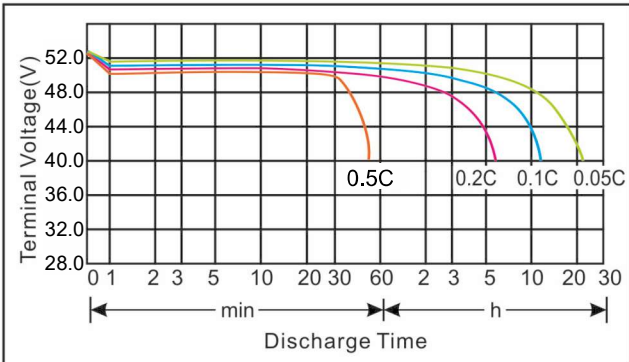

Cycle service life in relation to the depth of discharge

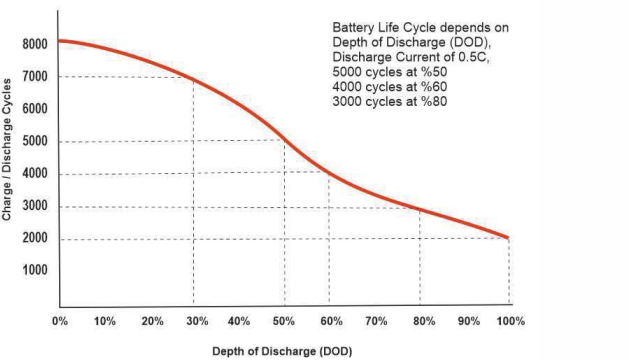

Residual Capacity

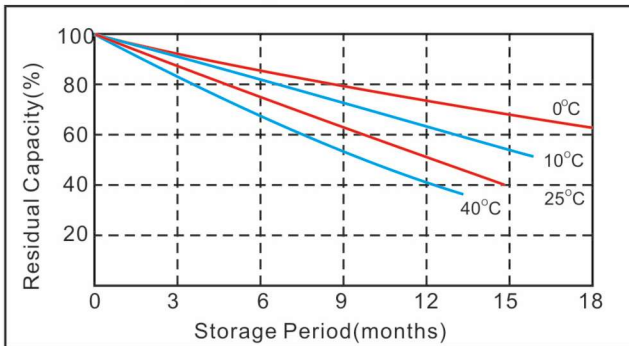


Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	1h	2h	3h	4h	5h	8h	10h	20h
40 V	630	314	210	158	126	79	63	31.5

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	1h	2h	3h	4h	5h	8h	10h	20h
40 V	7560	3780	2520	1890	1512	944	756	378

Constant voltage charging characteristics

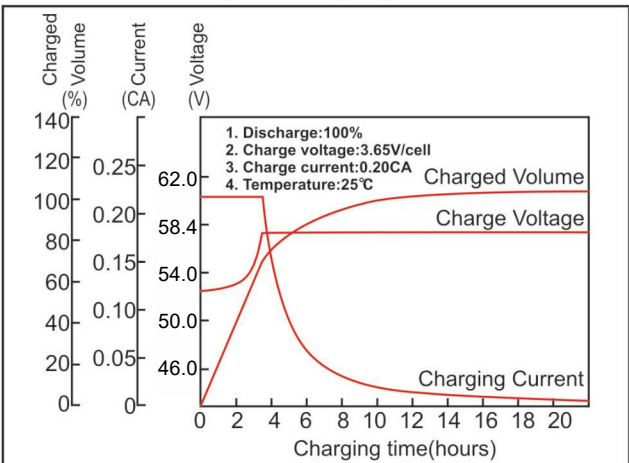

Capacity Factors With Different Temperature

Battery Type	-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Li Battery	51.2 V	73%	82%	93%	95%	97%	100%	100%	101%	102%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.